




上海双岭电子有限公司


CC4585

## 4-BIT MAGNITUDE COMPARATOR

- EXPANSION TO 8, 12, 16 ... 4 N BITS BY CASCADING UNITS
- MEDIUM-SPEED OPERATION : COMPARES TWO 4-BIT WORDS IN 180ns (typ.) AT 10V
- STANDARDIZED SYMMETRICAL OUTPUT CHARACTERISTICS
- 5V, 10V, AND 15V PARAMETRIC RATINGS
- INPUT CURRENT OF 100nA AT 18V AND 25°C FOR HCC DEVICE
- 100% TESTED FOR QUIESCENT CURRENT
- MEETS ALL REQUIREMENTS OF JEDEC TENTATIVE STANDARD N°13A, "STANDARD SPECIFICATIONS FOR DESCRIPTION OF "B" SERIES CMOS DEVICES"



### PIN CONNECTIONS

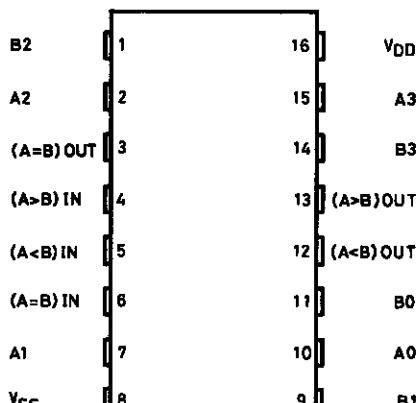


5-5149

### DESCRIPTION

The CC4585 (extended temperature range) and CC4585 (intermediate temperature range) are monolithic integrated circuits, available in 16-lead dual in-line plastic or ceramic package, and plastic micro package. The CC4585 is a 4-bit magnitude comparator designed for use in computer and logic applications that require the comparison of two 4-bit words. This logic circuit determines whether one 4-bit word (Binary or BCD) is "less than", "equal to", or "greater than" a second 4-bit word. The

CC4585 has eight comparing inputs (A3, B3, through A0, B0), three outputs (A < B, A = B, A > B) and three cascading inputs (A < B, A = B, A > B) that permit systems designers to expand the comparator function to 8, 12, 16 ... 4 N bits. When a single CC4585 is used, the cascading inputs are connected as follows : (A < B) = low, (A = B) = high, (A > B) = high. Cascading these units for comparison of more than 4 bits is accomplished as shown in typical application.

## FUNCTIONAL DIAGRAM

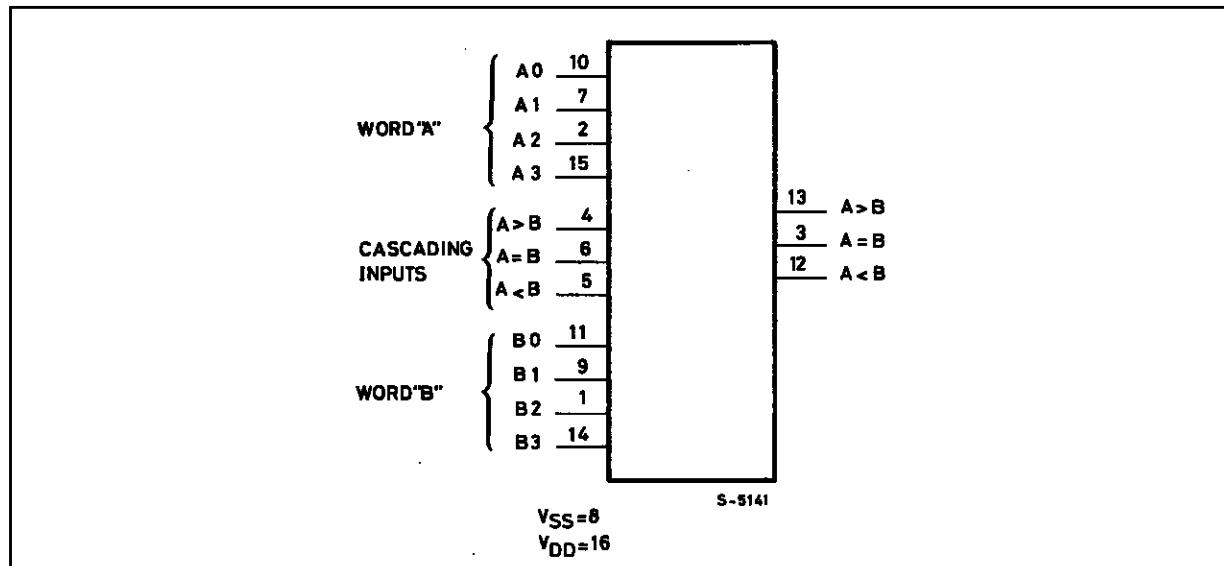

## ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
$V_{DD}^*$	Supply Voltage : HCC Types HCF Types	– 0.5 to + 20 – 0.5 to + 18	V V
$V_i$	Input Voltage	– 0.5 to $V_{DD}$ + 0.5	V
$I_i$	DC Input Current (any one input)	$\pm 10$	mA
$P_{tot}$	Total Power Dissipation (per package) Dissipation per Output Transistor for $T_{op}$ = Full Package-temperature Range	200 100	mW mW
$T_{op}$	Operating Temperature : HCC Types HCF Types	– 55 to + 125 – 40 to + 85	°C °C
$T_{stg}$	Storage Temperature	– 65 to + 150	°C


Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for external periods may affect device reliability.

\* All voltages are with respect to  $V_{SS}$  (GND).

## RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
$V_{DD}$	Supply Voltage : HCC Types HCF Types	3 to 18 3 to 15	V V
$V_i$	Input Voltage	0 to $V_{DD}$	V
$T_{op}$	Operating Temperature : HCC Types HCF Types	– 55 to + 125 – 40 to + 85	°C °C

## LOGIC DIAGRAM

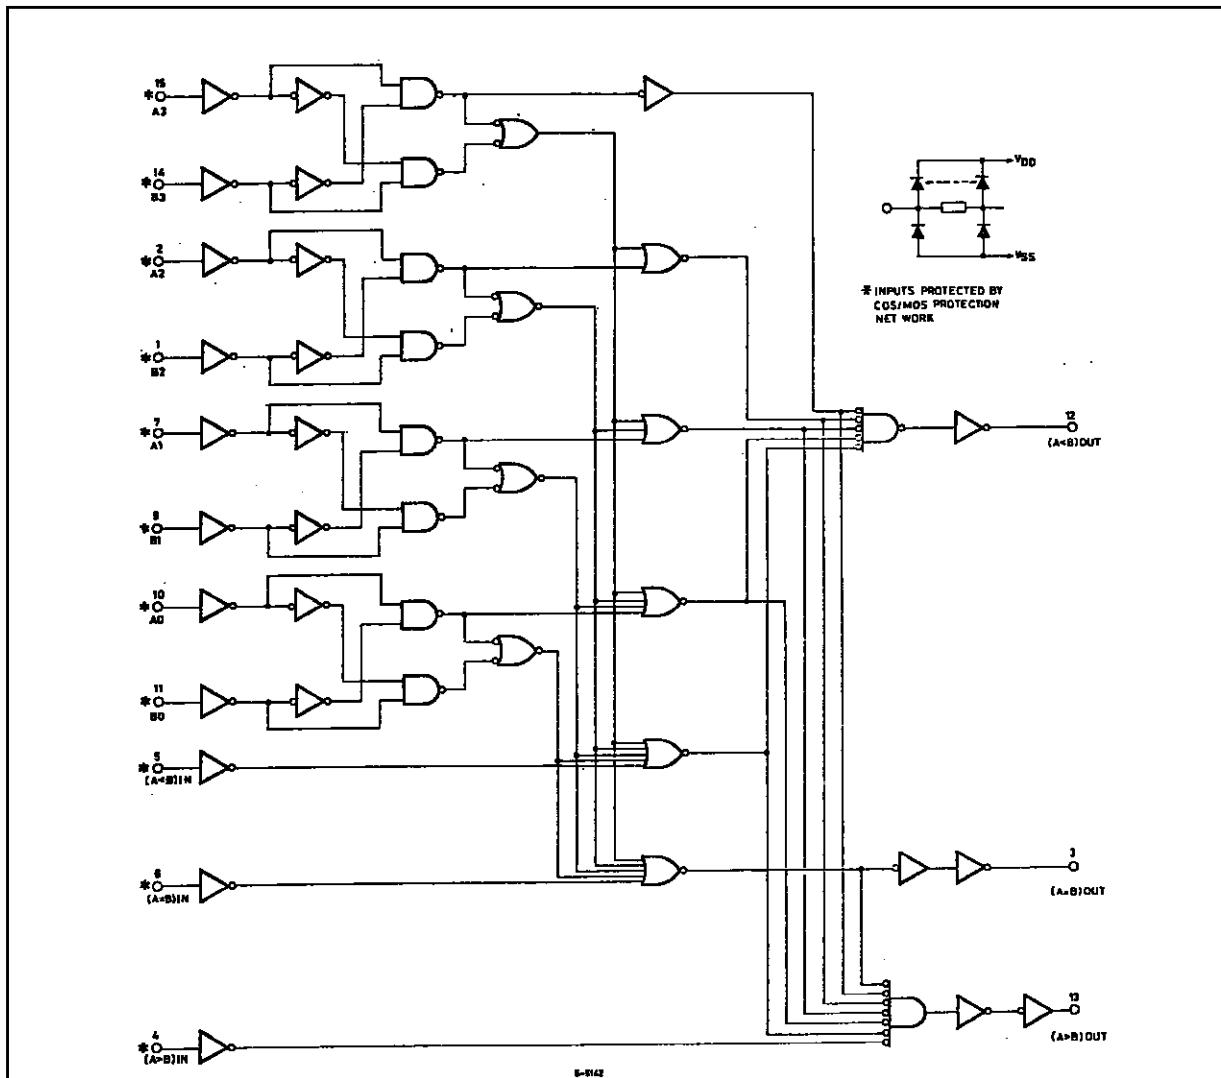

## TRUTH TABLE

Inputs				Comparing			Cascading			Outputs		
A3, B3	A2, B2	A1, B1	A0, B0	A < B	A = B	A > B	A < B	A = B	A > B	(A < B) OUT	(A = B) OUT	(A > B) OUT
A3 > B3	X	X	X	X	X	1	0	0	1			
A3 = B3	A2 > B2	X	X	X	X	1	0	0	1			
A3 = B3	A2 = B2	A1 > B1	X	X	X	1	0	0	1			
A3 = B3	A2 = B2	A1 = B1	A0 > B0	X	X	1	0	0	1			
A3 = B3	A2 = B2	A1 = B1	A0 = B0	0	0	1	0	0	1			
A3 = B3	A2 = B2	A1 = B1	A0 = B0	0	1	X	0	1	0			
A3 = B3	A2 = B2	A1 = B1	A0 = B0	1	0	X	1	0	0			
A3 = B3	A2 = B2	A1 = B1	A0 < B0	X	X	X	1	0	0			
A3 = B3	A2 = B2	A1 < B1	X	X	X	X	1	0	0			
A3 = B3	A2 < B2	X	X	X	X	X	1	0	0			
A3 < B3	X	X	X	X	X	X	1	0	0			

X = Don't Care

Logic 1 = High Level

## STATIC ELECTRICAL CHARACTERISTICS (over recommended operating conditions)

Symbol	Parameter	Test Conditions				Value						Unit	
		$V_I$ (V)	$V_o$ (V)	$ I_{ol} $ ( $\mu$ A)	$V_{DD}$ (V)	$T_{Low}^*$		$25^\circ C$			$T_{High}^*$		
						Min.	Max.	Min.	Typ.	Max.	Min.	Max.	
$I_L$	Quiescent Current	HCC Types	0/ 5		5		5		0.04	5		150	$\mu$ A
			0/10		10		10		0.04	10		300	
			0/15		15		20		0.04	20		600	
			0/20		20		100		0.08	100		3000	
		HCF Types	0/ 5		5		20		0.04	20		150	
			0/10		10		40		0.04	40		300	
			0/15		15		80		0.04	80		600	
$V_{OH}$	Output High Voltage	0/ 5		< 1	5	4.95		4.95			4.95		V
		0/10		< 1	10	9.95		9.95			9.95		
		0/15		< 1	15	14.95		14.95			14.95		
$V_{OL}$	Output Low Voltage	5/0		< 1	5		0.05			0.05		0.05	V
		10/0		< 1	10		0.05			0.05		0.05	
		15/0		< 1	15		0.05			0.05		0.05	
$V_{IH}$	Input High Voltage		0.5/4.5	< 1	5	3.5		3.5			3.5		V
			1/9	< 1	10	7		7			7		
			1.5/13.5	< 1	15	11		11			11		
$V_{IL}$	Input Low Voltage		4.5/0.5	< 1	5		1.5			1.5		1.5	V
			9/1	< 1	10		3			3		3	
			13.5/1.5	< 1	15		4			4		4	
$I_{OH}$	Output Drive Current	HCC Types	0/ 5	2.5		5	- 2		- 1.6	- 3.2		- 1.15	mA
			0/ 5	4.6		5	- 0.64		- 0.51	- 1		- 0.36	
			0/10	9.5		10	- 1.6		- 1.3	- 2.6		- 0.9	
			0/15	13.5		15	- 4.2		- 3.4	- 6.8		- 2.4	
		HCF Types	0/ 5	2.5		5	- 1.53		- 1.36	- 3.2		- 1.1	
			0/ 5	4.6		5	- 0.52		- 0.44	- 1		- 0.36	
			0/10	9.5		10	- 1.3		- 1.1	- 2.6		- 0.9	
			0/15	13.5		15	- 3.6		- 3.0	- 6.8		- 2.4	
$I_{OL}$	Output Sink Current	HCC Types	0/ 5	0.4		5	0.64		0.51	1		0.36	mA
			0/10	0.5		10	1.6		1.3	2.6		0.9	
			0/15	1.5		15	4.2		3.4	6.8		2.4	
		HCF Types	0/ 5	0.4		5	0.52		0.44	1		0.36	
			0/10	0.5		10	1.3		1.1	2.6		0.9	
			0/15	1.5		15	3.6		3.0	6.8		2.4	
$I_{IH}, I_{IL}$	Input Leakage Current	HCC Types	0/18	Any Input		18	$\pm 0.1$		$\pm 10^{-5}$	$\pm 0.1$		$\pm 1$	$\mu$ A
		HCF Types	0/15			15	$\pm 0.3$		$\pm 10^{-5}$	$\pm 0.3$		$\pm 1$	
$C_I$	Input Capacitance			Any Input					5	7.5			pF

\*  $T_{Low} = - 55^\circ C$  for HCC device :  $- 40^\circ C$  for HCF device.\*  $T_{High} = + 125^\circ C$  for HCC device :  $+ 85^\circ C$  for HCF device.The Noise Margin for both "1" and "0" level is : 1V min. with  $V_{DD} = 5V$ , 2V min. with  $V_{DD} = 10V$ , 2.5V min. with  $V_{DD} = 15V$ .